

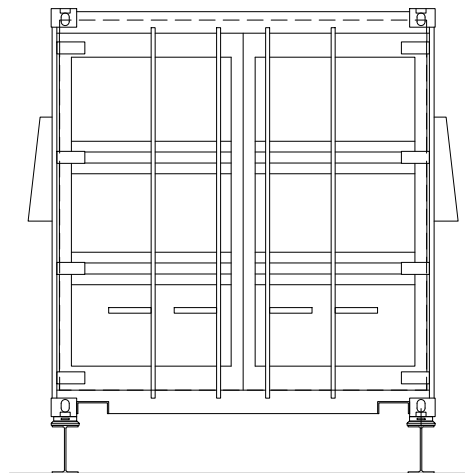


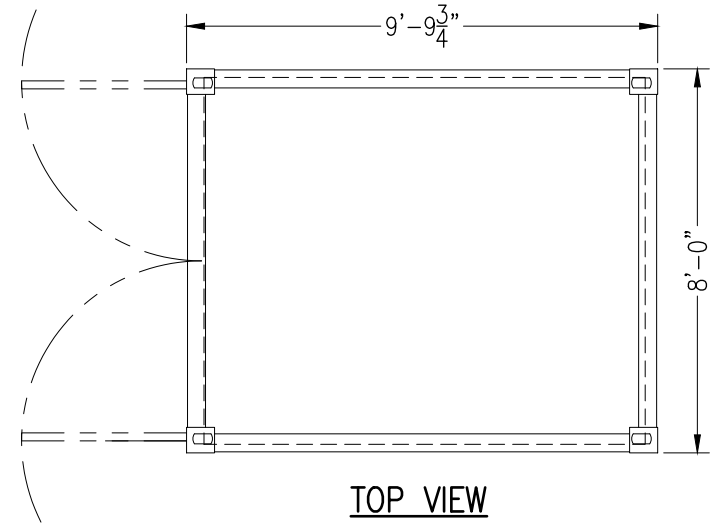

OPT. BEAM MOUNT
W/ TWISTLOCK

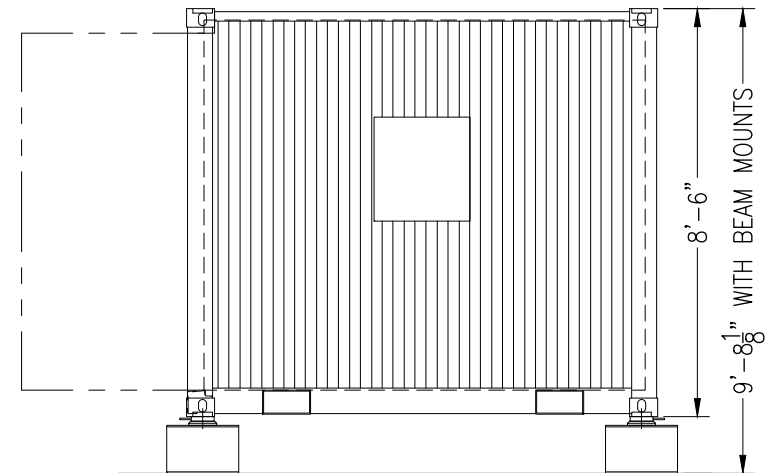

SPECIFICATIONS:

2x75HP (CAN RUN SIMULTANEOUSLY)

ELEC. REQUIREMENT: 1x480V/3/60, 250A

