
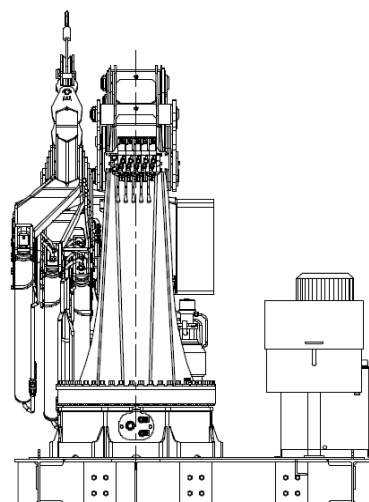


M380.24.A6 Skid Mounted Crane

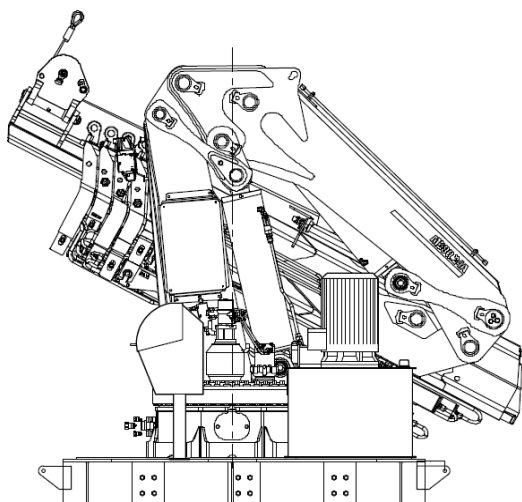

Portable Crane Lifting Diagram				
	Sea State 0		Sea State 3	
Lifting Radius (Ft)	Boom Hook (lbs)	Winch (lbs) single part	Boom Hook (lbs)	Winch (lbs) single part
9.8	-	-	-	-
15.4	14,980	9,080	12,915	9,080
21.3	10,295	9,080	9,042	9,042
27.2	7,700	7,700	6,468	6,468
33.1	5,970	5,970	4,928	4,928
39.0	4,785	4,785	3,927	3,927
44.9	4,000	4,000	3,267	3,267
50.9	3,465	3,465	2,805	2,805

Technical Details	
Motor Hp	60 hp, 480 Volt, 3 ph, 60 hz
Power Cable Details	100 Ft Marine Cable
Hydraulic Fluid	Chevron Clarity 68 Enviornmental Friendly Fluid
Lifting Wire Details	190 ft x 5/8" Dyform Cable (SWL 9,080 LBS)
Skid Dimensions	7' 7-3/4" x 7' 7-3/4"
Trucking Dimensions	7' 8"W x 10' 9"L x 9' 8"T
Package Weight	17,500 lbs
Brackets available for bolting to a 1" dia x 2' x 2' NATO Grid or	
Sacrificial plates available for welding to an 8' x 8' open deck area	