




GOASSETLEASING
GOAssetLeasing.com

EBI TC203 Telescopic Crane

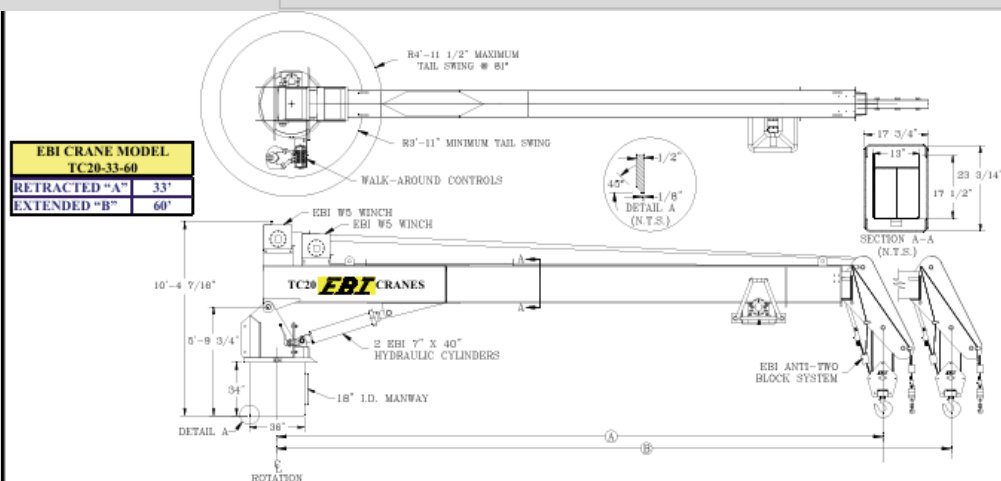

Lifting Data (33 ft Retracted)

Reach		Offboard Load		Onboard Load	
Meters	Feet	kg	lbs	kg	lbs
3	10	8,822	19,450	8,822	19,450
4.6	15	6,747	14,875	8,822	19,450
6.1	20	4,536	10,000	6,929	15,275
7.6	25	3,164	6,975	4,871	6,975
9.1	30	2,143	4,725	3,340	4,725
10.1	33	1,599	3,525	2,523	3,525

Lifting Data (60ft Extended)

Reach		Offboard Load		Onboard Load	
Meters	Feet	kg	lbs	kg	lbs
3	10	3,844	8,475	5,489	12,100
4.6	15	3,073	6,775	4,735	10,438
6.1	20	2,540	5,600	3,935	8,675
7.6	25	2,166	4,775	3,374	7,438
9.1	30	2,007	4,425	3,136	6,913
10.7	35	1,769	3,900	2,778	6,125
12.2	40	1,418	3,125	2,251	4,963
13.7	45	975	2,150	1,588	3,500
15.2	50	680	1,500	1,145	2,525
16.8	55	408	900	737	1,625

18.3	60	159	350	363	800
------	----	-----	-----	-----	-----

Technical Details	
Basic Crane Wt.	Apx. 13,344lbs. (6,065kgs)
Boom Lengths	33ft (10m) retracted. Can extend to 40, 50, 60ft (12.2, 15.2, 18.3m)
Load Line	(11,363 kgs) breaking strength; 5,000 lb (2,272 kgs) working strength
Fast Line	9/16" 19X7 EIPS IWRC; 25,000 lb (11,363 kgs) breaking strength; 5,000 lb (2,272 kgs) working strength
Onboard Load Calculations	1.5x Offboard Load
Pedestal Reactions	Based on 3x the offboard rated load